




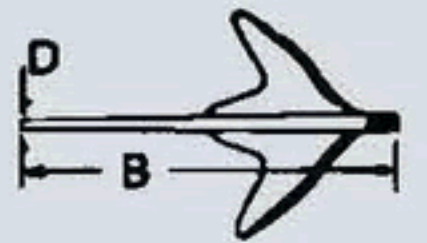

<b>BRUCE</b>		SUGGESTED SIZES				SPECIFICATIONS				
		For Boat Length (Storm conditions)*	Chain Diameter	Chain Length	Rode Diameter	Dimensions				
lb.	kg.					A	B	C	D	E
4.4	2	9' - 15'	3/16"	Minimum: 1 foot of chain for each foot of yacht length.	1/4"	7.0"	14.3"	9.7"	0.31"	4.7"
11	5	16' - 23'	3/16"		3/8"	9.3"	18.5"	12.4"	0.41"	7.0"
16.5	7.5	24' - 28'	1/4"		3/8"	10.6"	21.3"	14.2"	0.41"	7.5"
22	10	29' - 32'	5/16"		1/2"	11.4"	23.0"	15.3"	0.46"	8.0"
33	15	33' - 39'	3/8"		5/8"	12.9"	25.8"	17.6"	0.48"	8.7"
44	20	40' - 46'	3/8"		5/8"	14.3"	28.1"	18.5"	0.66"	9.5"
66	30	47' - 57'	1/2"		3/4"	16.0"	32.1"	21.3"	0.76"	11.0"
110	50	58' - 72'	5/8"		7/8"	18.9"	38.1"	25.3"	0.90"	13.4"
176	80	73' - 90'	3/4"		Larger anchors should be set with anchor chain only.	21.8"	42.9"	28.0"	1.00"	14.8"
242	110	91' - 106'	7/8"			24.1"	48.4"	31.9"	1.18"	17.3"
330	150	107' - 125'	1"	27.5"		53.4"	35.3"	1.46"	19.5"	
550	250	126' - 154'	1 1/4"	33.8"		63.7"	42.0"	1.69"	22.8"	

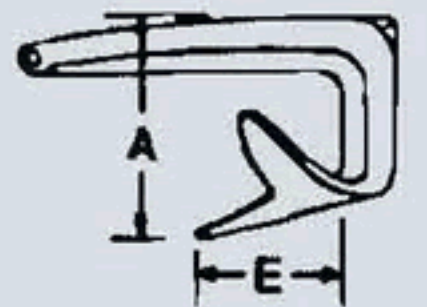

\* Storm conditions assume winds up to Force 9 (47 knots) and some protection from the sea, fair holding ground and proper anchoring technique. Yachts with unusual windage or which may anchor in more exposed locations should carry heavier anchors and matching ground tackle.

British Standard B.S. 3100-A6 heat-treated cast steel.